



flawless fusion with infinite possibilities

SIFAM
F I B R E O P T I C S

Visible Wavelength Coupler



The Visible Wavelength Coupler splits or combines light in the visible region. Versions optimised for any wavelength within the range 450nm to 700nm may be selected.

Designed for applications in display systems, sensors and biomedical equipment, the coupler utilises SIFAM's low loss fused fibre technology.

No light leaves the fibre and therefore no alignment is required; and there are no unwanted reflections. Furthermore the output fibre pigtailed systems may be directly integrated into beam delivery systems.

For components and modules which combine different wavelengths within the visible region please refer to the datasheet 'Visible Wavelength Combiners'.

Key Features:

- Visible wavelength operation
- Any coupling ratio available
- All fibre – no lens alignment
- No unwanted reflections
- Low light loss
- High power handling

Applications:

- Visible and display systems
- Sensors
- Biomedical equipment
- Research

SIFAM Fibre Optics Ltd
Broomhill Way, Torquay
Devon TQ2 7QL
England



Certificate No. 0962231

Tel: +44(0) 1803 407784
Fax: +44(0) 1803 407786
sales@sifamfo.com
www.sifamfo.com

Optical Specifications

Coupling Ratio (%) ₃	Available Housing Option	Grade ₁	Available Wavelength(s)	Coupling Ratio Tolerance (%)	Excess Loss (dB) ₂
10	3,4,5,6	A	500 to 700nm	±2	0.3
		B	450 to 700nm	±3	0.5
20	3,4,5,6	A	500 to 700nm	±3	0.3
		B	450 to 700nm	±4	0.5
30	3,4,5,6	A	500 to 700nm	±3	0.3
		B	450 to 700nm	±4	0.5
40	3,4,5,6	A	500 to 700nm	±4	0.3
		B	450 to 700nm	±5	0.5
50	3,4,5,6	A	500 to 700nm	±5	0.3
		B	450 to 700nm	±6	0.5

1. In 2x2 couplers performance is not specified for launch through second input port P4 (coloured blue)
2. Includes fibre losses for up to 1m pigtail length. Does not include connector losses.
3. Any coupling ratio available. Please contact us for specifications of coupling ratios not listed.

Parameter	Specification	Unit
Operating Wavelength	Specified wavelength within the range 450-700nm	nm
Operating / Storage Temperature Range ₁	-40 to +75 / -40 to + 85	°C
Pigtail Tensile Load	5	N
Fibre Type	Short wavelength speciality fibre	

1. For connectorised component, operating temperature range is -5 to +75°C.

Housing Option

Housing Code	Description	Dimensions (mm)	Pigtail
3	Regular	3.0 (Ø) x 55 (L) max.	Primary-coated fibre
4	Ø 0.9 mm slim	3.0 (Ø) x 76 (L) max	Ø 0.9 mm loose-tube
5	Ø 0.9 mm semi-ruggedised	5.0 (Ø) x 85 (L) max	Ø 0.9 mm loose-tube
6	Ø 3.0mm fully-ruggedised	80 (L) x 10 (W) x 8 (H)	Ø 3.0 mm fan-out sleeving

Configuration₁



1. 1x2 couplers for blue wavelengths i.e. <500nm are supplied as a 2x2 with an external termination on port P4.

SIFAM Fibre Optics Ltd
 Broomhill Way, Torquay
 Devon TQ2 7QL
 England




Certificate No. 0962231

Tel: +44(0) 1803 407784
 Fax: +44(0) 1803 407786
 sales@sifamfo.com
 www.sifamfo.com

Ordering Code Information

Example:

FFS-G32K31A10 (Fused Fibre Speciality Coupler, 532nm, 50/50 coupling ratio, regular housing, 1x2, A grade, 1m pigtailed, no connectors)

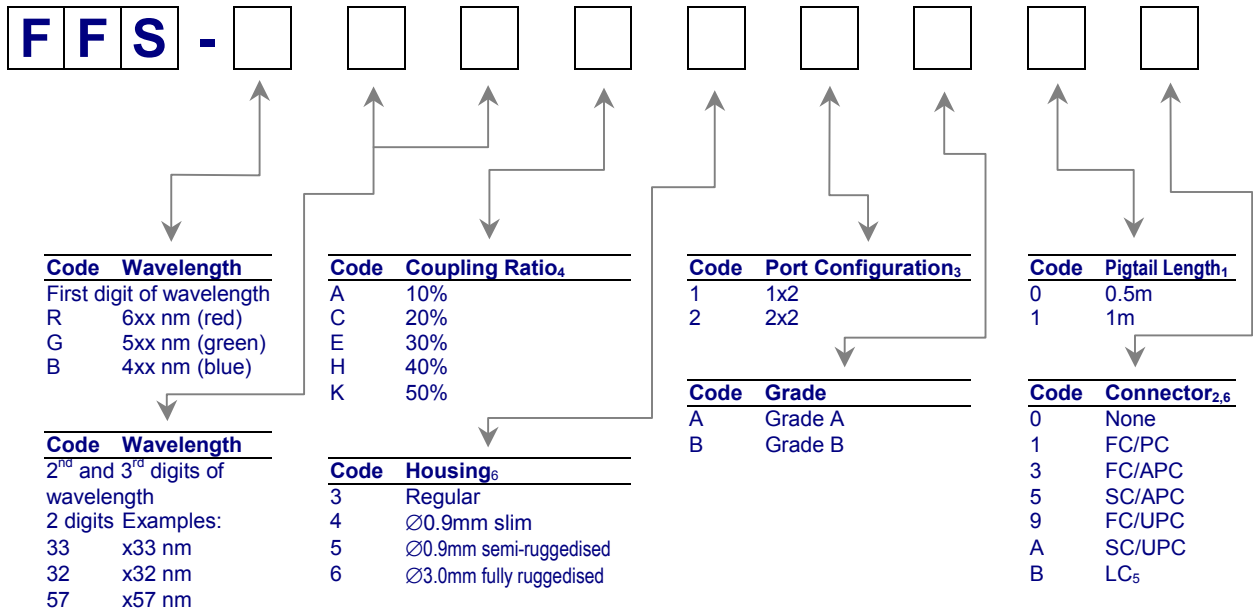

1. Minimum pigtail length. Further pigtail lengths available on request. Where connectorised, pigtail length is to connector end face.
2. Excess Loss in specification table does not include connector losses.
3. 1x2 couplers for blue wavelengths i.e. <500nm are supplied as a 2x2 with an external termination on port P4.
4. Any coupling ratio available. Please contact SIFAM for ordering codes of coupling ratios not listed.
5. LC connector not available for housing code 6, fully ruggedised housing.
6. Connectors may be fitted to housing types 4, 5 and 6. For connectorisation of housing type 3 please contact the sales office.

SIFAM Fibre Optics Ltd
 Broomhill Way, Torquay
 Devon TQ2 7QL
 England



Certificate No. 0962231

Tel: +44(0) 1803 407784
 Fax: +44(0) 1803 407786
 sales@sifamfo.com
 www.sifamfo.com